

## (So) larbrite

ceramic NANO Silver



Luxury Vinyl Planks



DW 7001



DW 1371



DW 1763



DW 8500



DS 116




DW 1712



DW 1753



DW 2008

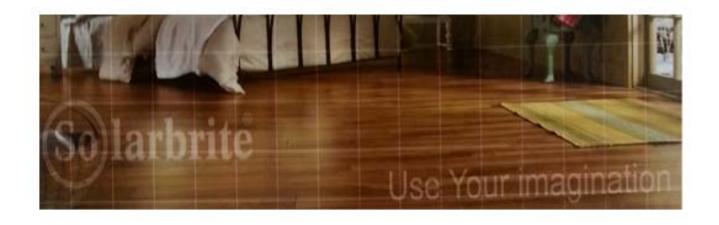




DW 1361



DW 1742



DW 1504

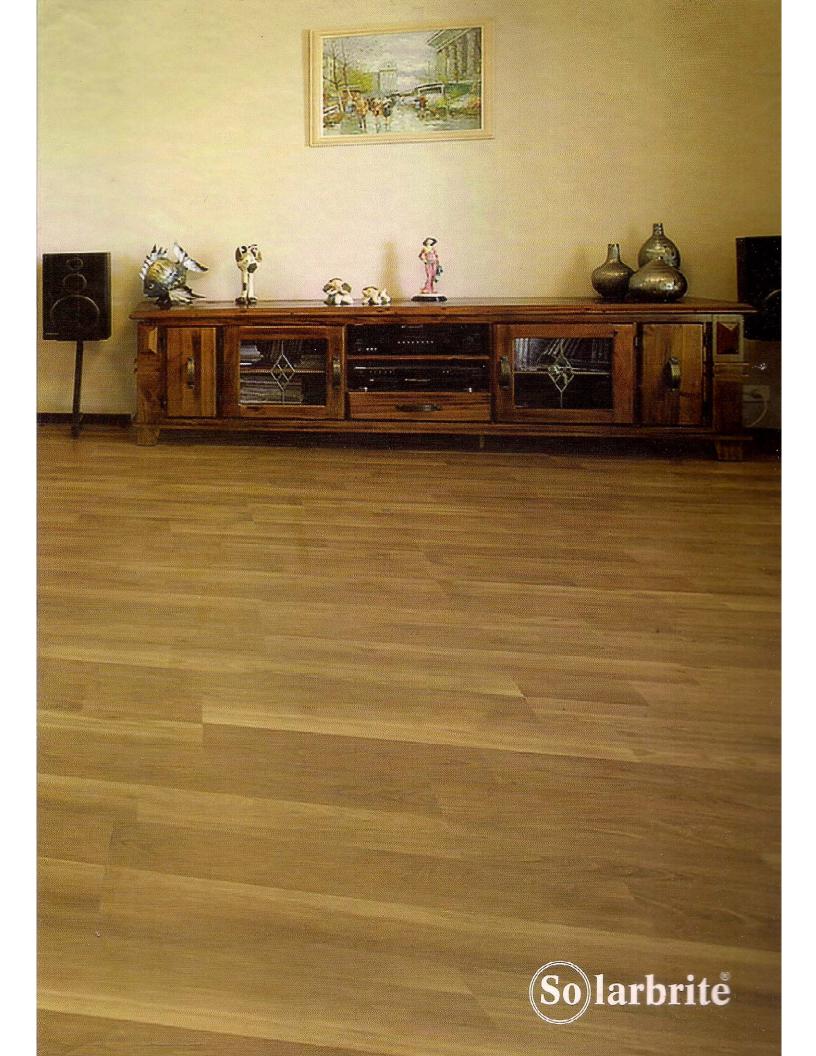



75% Post-Consumer Recycled Content, 100% Recyclable After Use SOLARBRITE PVC Floor plank / tile meets the requirements of EN 649.

| ITEM   |  | DATA   |
|--|--|--|
| Type & Composition   |  | PVC Decorative, Laminated with Textured Matt Finish  |
| Application  |  | Commercial, Residential, Households  |
| Thickness (mm)   | Wear Layer   | 0.30 mm with Micro Ceramic & Nano Silver Coating (Antibacterial)   |
|  | Total Layer  | 3.0 mm   |
| Plank Size   |  | 184mm x 950mm (7.24 Inch x 37.40 Inch.)  |
| Packing Box  |  | 19 Pcs / Box (3.32 m²)   |
| Installation   |  | Glue Down.   |
| Weight (kg/m²)   | 0.3/3.0 (max)  | 5.36 (1.10lb/sq/ft)  |
|  | The state of the s |  |
| Residual indentation   | EN 433   | ≤ 0.10 mm  |
| Fire rating  | EN13501-1  | Bfl - S1   |
|  | ASTM E 84  | Class 1  |
|  |  | The second secon |
| Slip resistance  | ASTM C1028   | Dry : 0.72 (Slipperiness level: "Safe")  |
| (Static Coefficient of Friction)   | (>0.50)  | Wet: 0.67 (Slipperiness level: "Safe")   |
|  |  |  |
| Electrical behavior  | EN 1081  | Pass   |
| Dimensional stabillity   | EN 434   | ≤ 0.25%  |
|  |  | A CONTRACTOR OF THE PARTY OF TH |
| The above information is subject to modifications for the benefit of further improvements. |  |  |
| Actual Draduction Chada f  |  |  |

Made in Korea

Actual Production Shade may vary from sample chips